

TOL-302UGFC3.7-3.0


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-302UGFC3.7-3.0	AlGaInP	Hyper GRENN	Water Clear

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 3mm diameter package.
- Long life, stable and reliable.
- RoHS compliant

Dimensions

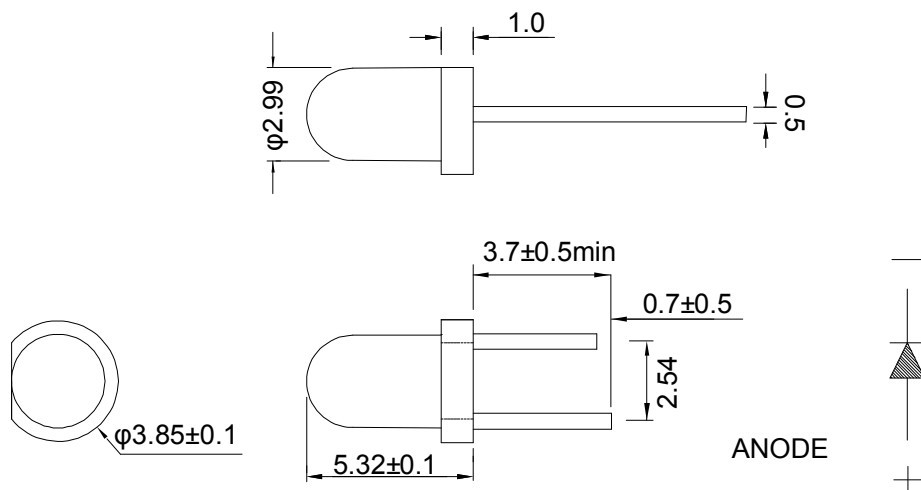

Notes:

1. All dimensions are in millimeter.
2. Tolerance is $\pm 0.25 \text{ mm}$ unless otherwise noted.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation (Tamb≤60°C)	80	mW
Continuous Forward Current	30	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Solder ability	235±5 °C for 3±0.5 sec	
Wave Soldering Profile For Lead Free Soldering	260°C for 5 Sec	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	IV		394		mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		20		deg	I _F =20mA
Dominant Wavelength	λ _d		570		nm	I _F =20mA
Spectral Line Half-Width	Δλ		20		nm	I _F =20mA
Forward Voltage	VF		2.0		V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.

Bin Code List for Reference

Luminous Intensity		Unit : mcd@20mA
Bin Code	Min	Max
B35	316	394
B36	394	493
B37	493	620

Tolerance of Luminous Intensity on each bin is $\pm 11\%$.

Dominant Wavelength		Unit : nm@20mA
Bin Code	Min	Max
74	566	568
75	568	570
76	570	572
77	572	574
78	574	576

Tolerance of Dominant Wavelength on each bin is $\pm 1\text{nm}$

Forward Voltage		Unit : V@20mA
Bin Code	Min	Max
05	1.8	2.0
06	2.0	2.2
07	2.2	2.4

Tolerance for each Forward Voltage Bin is $\pm 0.1\text{V}$