

TOL-303UGAC


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-303UGAC	AlGaInP	ULTRA YELLOW GREEN	Water Clear

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 3mm diameter package.
- Long life, stable and reliable.
- RoHS compliant

Dimensions

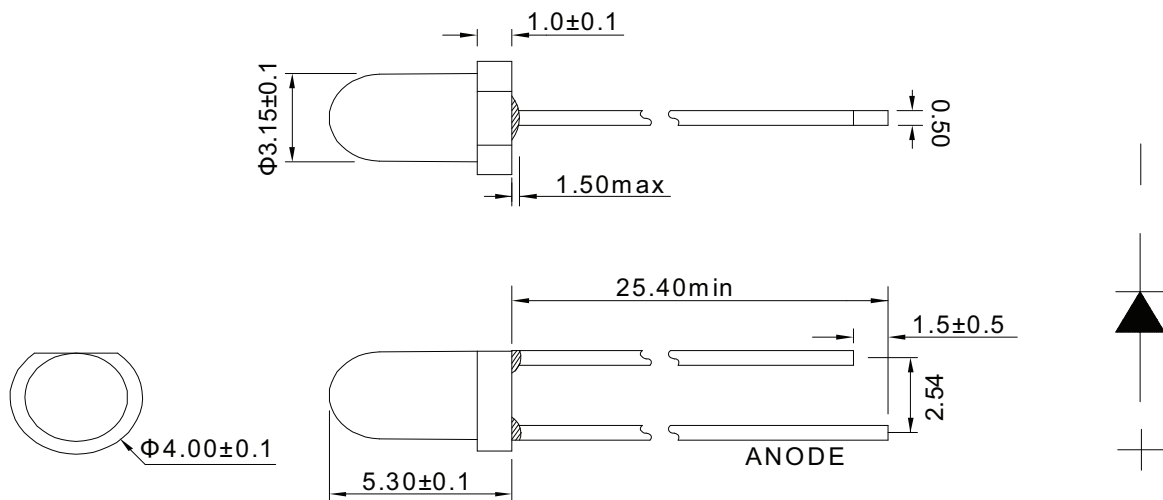

Notes:

1. All dimensions are in millimeter.
2. Tolerance is $\pm 0.25 \text{ mm}$ unless otherwise noted.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation (Tamb≤60°C)	75	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Wave Soldering Profile For Lead Free Soldering	260°C for 5 Sec	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	IV		162		mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		30		deg	I _F =20mA
Dominant Wavelength	λ _d		572		nm	I _F =20mA
Spectral Line Half-Width	Δλ		17		nm	I _F =20mA
Forward Voltage	V _F		2.0		V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.

Bin Code List for Reference

Luminous Intensity		Unit : mcd@20mA	
Bin Code	Min	Max	
B30	103	129	
B31	129	162	
B32	162	202	
B33	202	252	

Tolerance of Luminous Intensity on each bin is $\pm 11\%$.

Dominant Wavelength		Unit : nm@20mA	
Bin Code	Min	Max	
74	566	568	
75	568	570	
76	570	572	
77	572	574	
78	574	576	

Tolerance of Dominant Wavelength on each bin is $\pm 1\text{nm}$

Forward Voltage		Unit : V@20mA	
Bin Code	Min	Max	
05	1.8	2.0	
06	2.0	2.2	
07	2.2	2.4	

Tolerance for each Forward Voltage Bin is $\pm 0.1\text{V}$