

TOL-30aSOgCAa-S7-3.9


Lamp LED

| Part Number | Chip | | Lens Color |
|----------------------|----------|--------------|-------------|
| | Material | Source Color | |
| TOL-30aSOgCAa-S7-3.9 | AlGaInP | Amber | Water Clear |

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 3mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

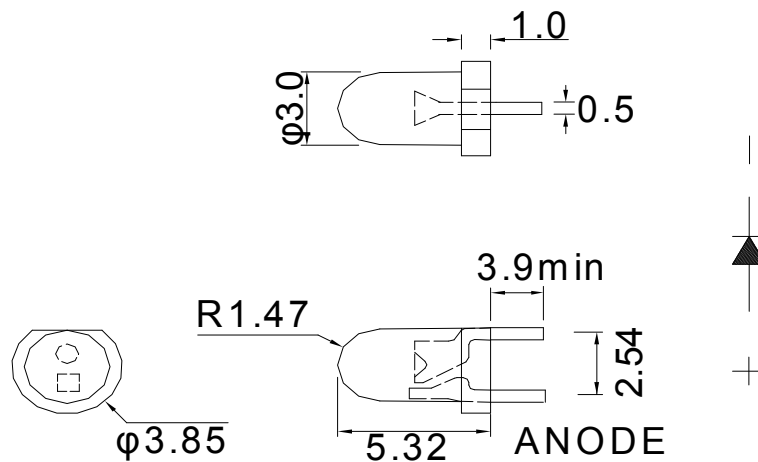

Notes:

1. All dimensions are in millimeter.
2. Tolerance is ± 0.5 mm unless otherwise noted.
3. HONG.Y 成型自動剪腳機作業

Absolute Maximum Rating @ Ta=25°C

| Parameter | Maximum Rating | Unit |
|--|-----------------|------|
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 60 | mA |
| Power Dissipation | 75 | mW |
| Continuous Forward Current | 20 | mA |
| Reverse Voltage | 5 | V |
| Operating Temperature Range | -40°C to +80°C | |
| Storage Temperature Range | -40°C to +100°C | |
| Wave Soldering Profile For Lead Free Soldering | 260°C for 5 Sec | |

Electrical / Optical Characteristic @ Ta=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-------------------|------|------|------|------|----------------------|
| Luminous Intensity | IV | | 2410 | | mcd | I _F =20mA |
| Viewing Angle | 2θ _{1/2} | | 20 | | deg | I _F =20mA |
| Dominant Wavelength | λ _d | | 605 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 20 | | nm | I _F =20mA |
| Forward Voltage | V _F | | 2.0 | | V | I _F =20mA |
| Reverse Current | I _R | | | 10 | μA | V _R =5V |

* Please refer to CIE 1931 chromaticity diagram.