

TOL-36TUBEK-C


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-36TUBEK-C	InGaN/GaN	Ultrar Blue	Blue Diffused

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 3mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

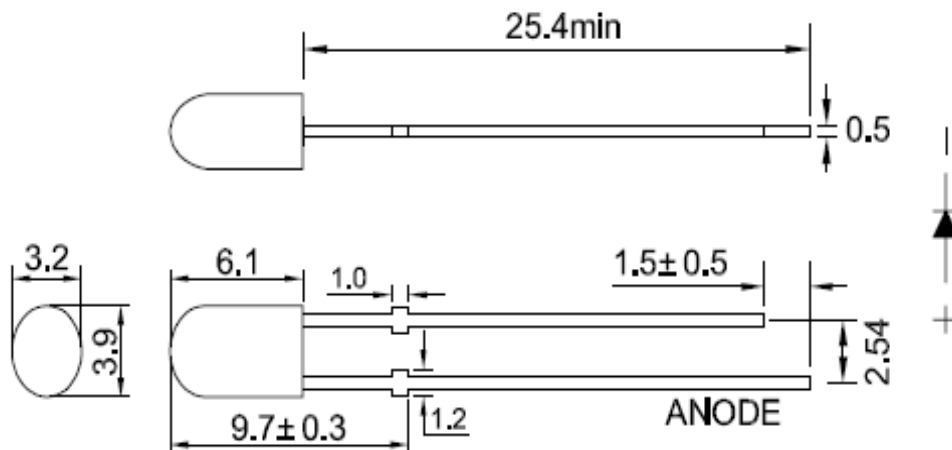

Notes:

1. All dimensions are in millimeter.
2. Tolerance is ±0.25mm unless otherwise noted

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation	120	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-40°C to +105°C	
Wave Soldering Profile For Lead Free Soldering	260°C, 5 Seconds	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	430		560	mcd	I _F =20mA
Viewing Angle	2θ _{1/2H-H}		110		deg	I _F =20mA
	2θ _{1/2V-V}		45		deg	I _F =20mA
Dominant Wavelength	λ _d		470		nm	I _F =20mA
Spectral Line Half-Width	Δλ		26		nm	I _F =20mA
Forward Voltage	V _F		3.2		V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.