

TOL-504UECD


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-504UECD	AlGaInP	ULTRA ORANGE	Red Diffused

Features

- I.C. compatible
- Low power consumption
- Compatible with wave soldering process
- 5mm diameter package
- Long life, stable and reliable
- RoHS compliant

Dimensions

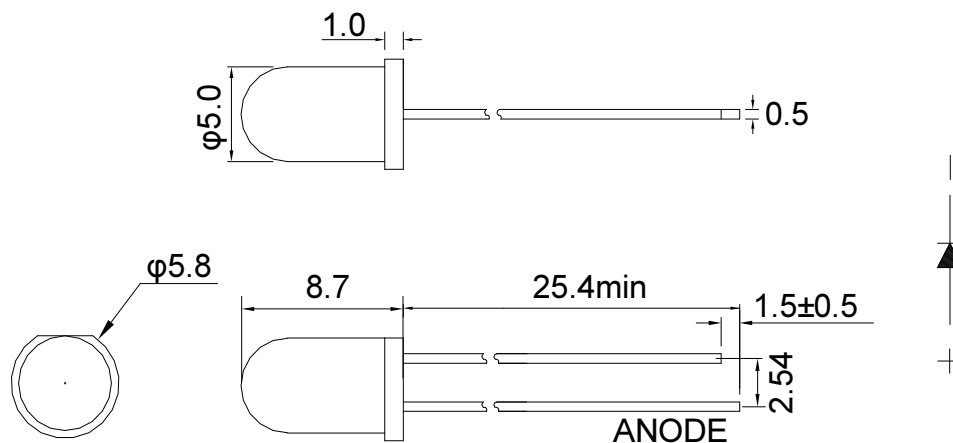

Notes:

1. All dimensions are in millimeter.
2. Tolerance is $\pm 0.25\text{mm}$ unless otherwise noted

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation	105	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Wave Soldering Profile For Lead-free Soldering	260°C for 5 Seconds	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	250		330	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		40		deg	I _F =20mA
Dominant Wavelength	λ _d		625		nm	I _F =20mA
Spectral Line Half-Width	Δλ		18		nm	I _F =20mA
Forward Voltage	V _F		2.0		V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V