

TOL-50bUGbDEs-501-U5


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-50bGbDEs-501-U5	AlGaInP	Ultra Green	Green Diffused

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 5mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

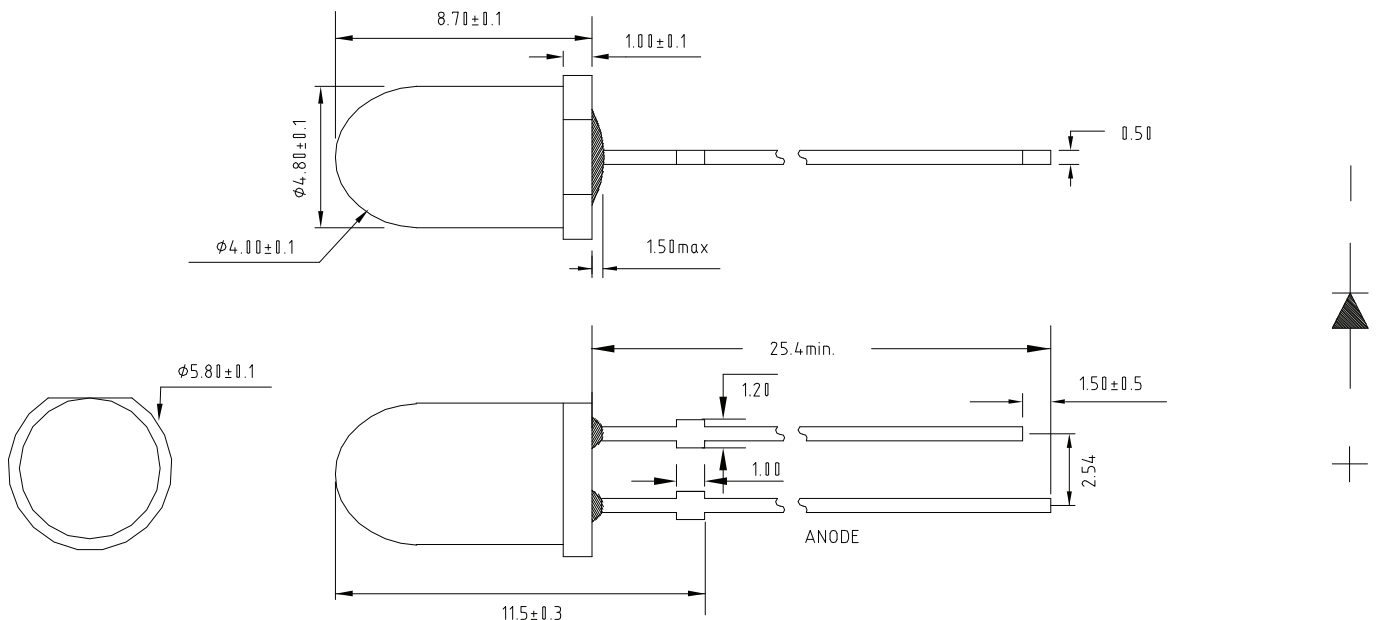

Notes:

1. All dimensions are in millimeter.
2. Tolerance is $\pm 0.25 \text{ mm}$ unless otherwise noted.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation (Tamb ≤ 60°C)	75	mW
Continuous Forward Current	20	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +80°C	
Storage Temperature Range	-40°C to +100°C	
Wave Soldering Profile For Lead-free Soldering	260°C for 10 Seconds	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	32.8	80		mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		50		deg	I _F =20mA
Dominant Wavelength	λ _d		574		nm	I _F =20mA
Spectral Line Half-Width	Δλ		15		nm	I _F =20mA
Forward Voltage	V _F		2.2		V	I _F =20mA
Reverse Current	I _R			100	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.