

TOL-306HYBT


Lamp LED

Part Number	Chip		Lens Color
	Material	Source Color	
TOL-306HYBT	GaAsP	High Yellow	Yellow Transparent

Features

- I.C. compatible.
- Low power consumption.
- Compatible with wave soldering process.
- 3.1mm diameter package.
- Long life, stable and reliable.
- RoHS compliant.

Dimensions

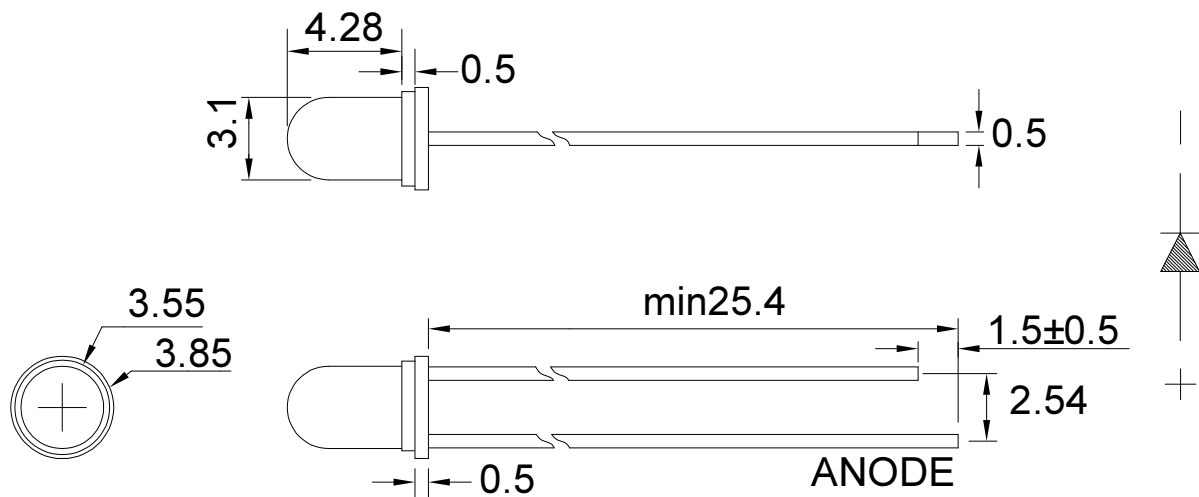

Notes:

1. All dimensions are in millimeter.
2. Tolerance is ± 0.25 mm unless otherwise noted.

Absolute Maximum Rating @ Ta=25°C

Parameter	Maximum Rating	Unit
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Power Dissipation	75	mW
Continuous Forward Current	30	mA
Reverse Voltage	5	V
Operating Temperature Range	-40°C to +85°C	
Storage Temperature Range	-40°C to +105°C	
Wave Soldering Profile For Lead-free Soldering	260°C, 5 Seconds	

Electrical / Optical Characteristic @ Ta=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I _v	190		250	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}		65		deg	I _F =20mA
Dominant Wavelength	λ _d		585		nm	I _F =20mA
Spectral Line Half-Width	Δλ		35		nm	I _F =20mA
Forward Voltage	V _F	1.8	2.1	2.4	V	I _F =20mA
Reverse Current	I _R			10	μA	V _R =5V

* Please refer to CIE 1931 chromaticity diagram.