

TOD-23201BMP-B

Dual Digit Display LED

| Part Number | Chip | | Face Color | Segment Color |
|----------------|----------|---------------|------------|---------------|
| | Material | Source Color | | |
| TOD-23201BMP-B | InGaN | Hi-pure green | Black | White |


Features

- (2.30") 56.80mm digit height
- Common anode
- I.C. compatible
- Low power requirement
- RoHS compliant

Applications

- Audio equipment
- Instrument panels
- Digital read out display

Package Dimensions & Internal Circuit Diagram

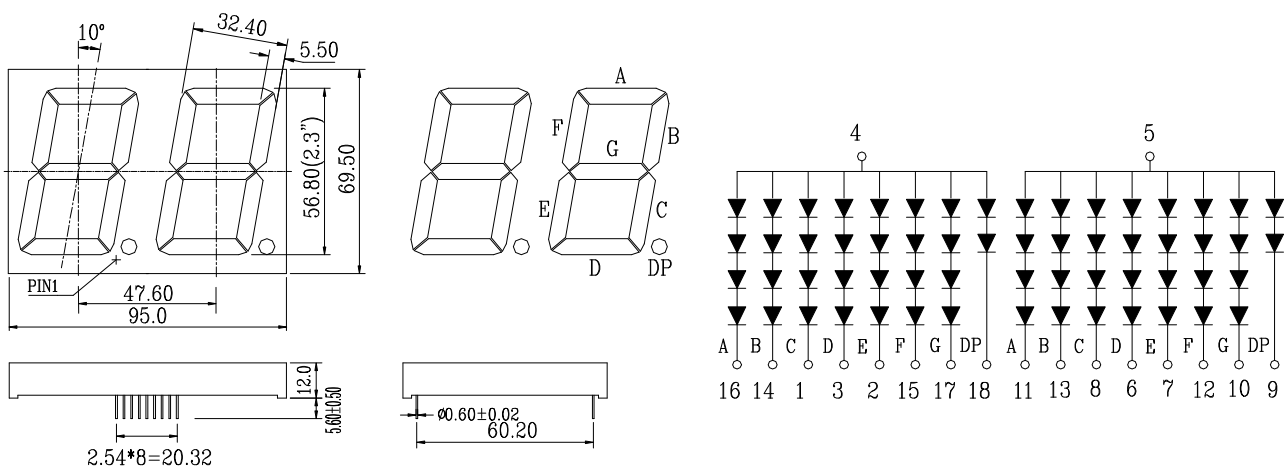

Notes:

1. All dimensions are in millimeters, tolerance: ± 0.25 ; Angle: $\pm 0.1^\circ$ unless otherwise noted.
2. Specifications are subject to change without notice.

Absolute Maximum Rating @ Ta=25°C

| Parameter | Maximum Rating | Unit |
|---|-----------------|------|
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 80 | mA |
| Power Dissipation(Except DP) | 420 | mW |
| Continuous Forward Current | 20 | mA |
| Recommend Operating Current | 12 | mA |
| Reverse Voltage(Except DP) | 20 | V |
| Operating Temperature Range | -25°C to +85°C | |
| Storage Temperature Range | -30°C to +85°C | |
| Lead-Free Solder Temperature(1/16 Inch Below Seating Plane) | 260°C for 3 Sec | |

Electrical / Optical Characteristic @ Ta=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition | Grade |
|----------------------------------|-----------------|------|------|-------|---------|----------------|-------|
| Dominant Wavelength | λ_d | | 525 | | nm | $I_F=20mA$ | |
| Spectral Line Half-Width | $\Delta\lambda$ | | 26 | | nm | $I_F=20mA$ | |
| Forward Voltage(Except DP) | V_F | | 12.8 | 14.0 | V | $I_F=20mA$ | |
| Reverse Current | I_R | | | 100 | μA | $V_R=10V$ | |
| Luminous Intensity Matching Rate | lv-m | | | 2.0:1 | | $I_F=20mA$ | |

The DISPLAYS should be kept at 30°C or less and 60%RH or less. The DISPLAYS should be used within one year.